



gypsemna

METAL PROFILES BY RONDO

Direct Fixing Clip with Anchor Technical Datasheet

Description

The Direct Fixing Clip with Anchor is an ideal component for battening out irregular walls. For surfaces that do not require any alignment but would require a cavity for cables or plumbing, the Battens should be used. These clips are used as a direct fixing of furring channels and battens to either concrete, timber wall or ceiling structures. The Direct Fixing Clips need to be fixed along the sections in accordance with the relevant maximum span tables.


1155400

Primary Data

Drywall Product	Direct Fixing Clip with Anchor
Drywall System	Keylock Ceiling System & Liner System
Coating	AZ150 Zinc- Aluminium Alloy
Steel Grade	G300 Min. Yield Strength: 300 Mpa Min. Tensile Strength: 340 Mpa
Material	Galvanized Steel


Technical Data

Part No.	Thickness (mm)	Mass (Kg)
A239	1.25	0.050

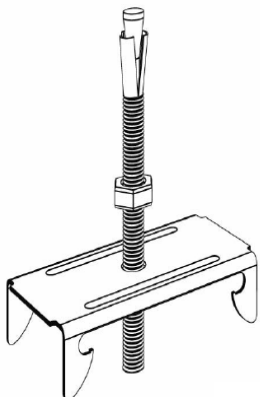

**PN.
239A**

Furring Channel

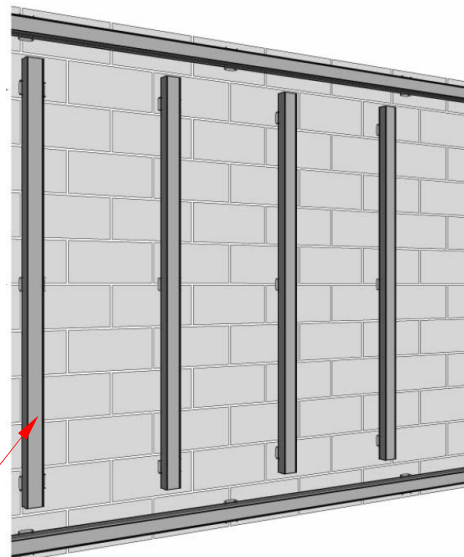

Typical Application