




GYPSEMNA
MOISTURE RESISTANT
SOUND PROTECT
GYPSUM BOARD
MRSP - 15mm

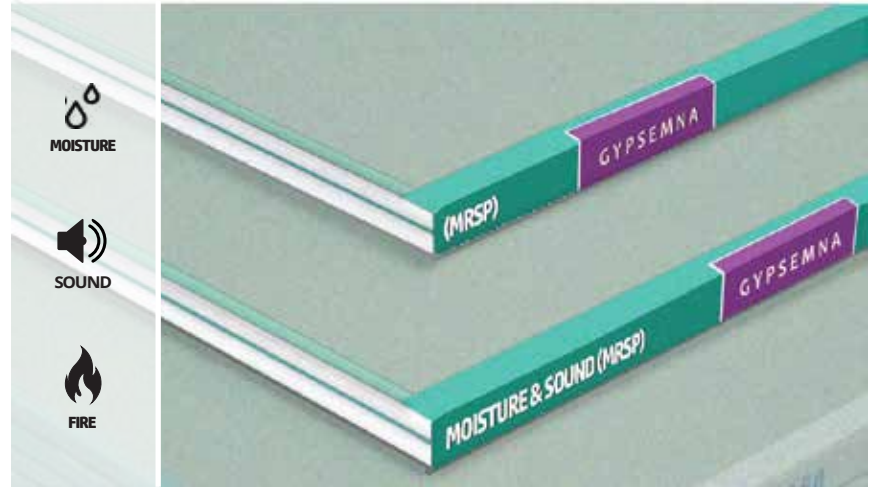

DESCRIPTION

Gypsemna Moisture Resistance Sound Protect (MRSP - 15mm) is an interior gypsum board consisting of a solid-set, moisture- and sound-resistant Type X gypsum core, enclosed in green-coloured face paper and a strong liner back paper. The board provides combined moisture resistance, acoustic performance, and fire protection when used in tested wall and ceiling assemblies. The long edges are slightly tapered to allow joints to be reinforced and concealed with joint tape and joint compound. Both the face and back papers are 100% recyclable.

BASIC USES

Gypsemna Moisture Resistance Sound Protect (MRSP – 15mm) is used in interior wall and ceiling systems where enhanced moisture resistance, acoustic performance, and fire resistance is required. It is an ideal solution for wet areas such as bathrooms, kitchens, and laundries, and is suitable for use as a substrate for ceramic tiles. The board is suitable for both new construction and renovation projects with steel framing. It is typically screw-fixed to steel studs spaced at a maximum of 600 mm and can also be applied by lamination or using approved adhesive systems.

ADVANTAGES

- Acoustically tested.
- Moisture resistant.
- Fire-rated up to 2 hours.
- Consistently high quality.
- Uniform, flat and attractive appearance with no shadows.
- High edge hardness.
- Edge tapers consistently to form perfect joints.
- High-strength core eliminates crumbling and cracking.
- Excellent thermal barrier and sound attenuation properties.
- Green certified and qualifies as a low-VOC product.

TECHNICAL DATA

PHYSICAL PROPERTIES

Nominal thickness	15mm
Nominal width	1200mm
Standard length	2400, 3000mm
Nominal weight	13.09kg/m ²
Edges	TE, SE
Colour	Green

FIRE PERFORMANCE

Core type	Type X
Combustibility	Non combustible core
Surface burning characteristics	Class A
Flame spread	0
Smoke development	15

STANDARDS & REFERENCES

ASTM C1396	Product standard compliance.
ASTM C473	Standard test methods for physical testing of gypsum panel products.
ASTM C840	Standard specification for application and finishing of gypsum board.
ASTM E84	Standard test method for surface burning characteristics of building materials.
ASTM E90	Standard test method for laboratory measurement of airborne sound transmission loss of building partitions and elements.
EN 520 (Type F, D and H1)	Standard for gypsum plasterboard performance.