




GYPSEMNA U TRACK

METAL PROFILES

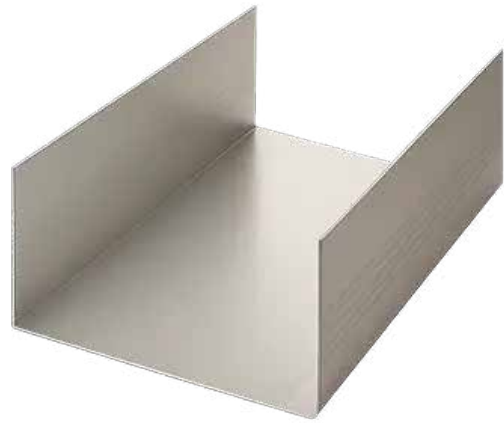


DESCRIPTION

Gypsemna U Track profile provides a friction-fit for the studs, which not only holds the studs in position until the lining board is installed, but also helps to align the boards. Components for drywall stud and track products are cold roll-formed from hot-dipped galvanised steel (corrosion-resistant) and are available in various sizes and thicknesses.

BASIC USES

Gypsemna U Track is the horizontal top and bottom elements of drywall structure into which the corresponding Gypsemna C Stud is fitted. A strong, non-load-bearing component for exterior and interior drywall partition, ceilings and liners



ADVANTAGES

- Provides a smooth, monolithic wall finish.
- Fire-resistant performance.
- Flexible configuration options.
- Dimensionally stable.
- Impervious to rot, fungal growth and insect attack.
- Corrosion-resistant.
- Will not warp, twist, or bow.
- Easy to cut and install; minimal tools required.
- Non-combustible.

TECHNICAL DATA

PHYSICAL PROPERTIES

Coating Z120, Z180 and Z275 Zinc coating

Standard compliance ASTM C645 / ASTM A653
ASTM A645/ ASTM A370

Material Cold roll-formed from hot-dipped galvanized steel

Grade G300
Minimum yield strength 300 MPa
Minimum tensile strength 340 MPa

Available thicknesses (mm) 0.50, 0.55, 0.6, 0.7
0.8, 0.9, 1.0, 1.1,
1.2, 1.3 and 1.5

Flange (mm) 32

Width (mm) 52, 66, 72, 78, 94,
102, 127 and 152

Length (mm) 3000