GYPSEMNA

GYPSEMNA CEILING TILES

GYPSUM TILES
09 29 00/GC

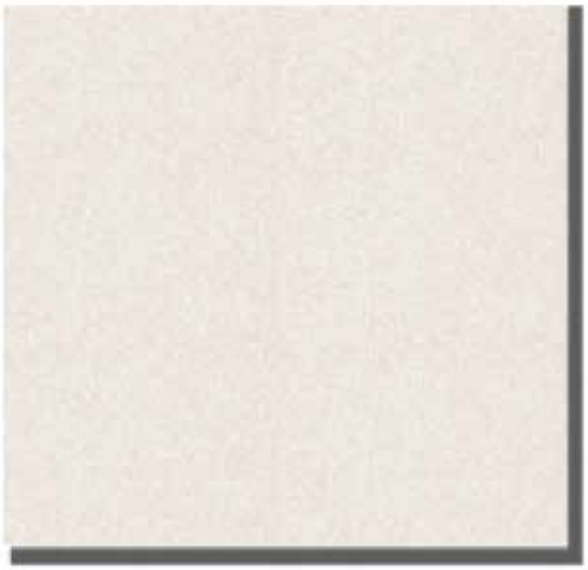

DESCRIPTION

Gypsemna Gypsum Ceiling Tile is a gypsum board with a white PVC laminated face and a PET (Polyethylene Terephthalane) metallic foil on the reverse side. The PET metallic foil is commonly referred to as a Polyester film. Its gypsum core offers non combustibility and mechanical stability to the tile. The white PVC face offers an aesthetic finish and its surface can be brushed and/or cleaned with a mild detergent and damp cloth.

BASIC USES

Gypsemna Gypsum Ceiling Tile is the ideal product to use with our Gypsemna T24 T-Grid Suspension System, providing quick and easy access to any part of the false ceiling. It's advantages are; easy to clean, attractive and aesthetic surface finish, lightweight and simple installation. It is suitable for most. common areas (dry & wet) such as toilets, bathrooms, kitchens, corridors and service area. Suitable for a multitude of sectors such as residential, commercial, healthcare, airports, cinemas and educational projects.

FACE SIDE



REVERSE SIDE



TECHNICAL DATA

PHYSICAL PROPERTIES

Nominal thickness	7, 9 and 12mm
Nominal width	595mm
Standard length	595mm
Nominal weight	5, 6.41 and 8.90kg/m2
Edges	SE

FIRE PERFORMANCE

Core type	Type C
Combustibility	Non combustible core
Surface burning characteristics	Class A
Flame spread	0
Smoke development	15

STANDARDS AND REFERENCES

ASTM C1396	Product standard compliance
EN 520 - Type A	Standard for performance of gypsum plasterboards